

**COLD WATER H.P. CLEANER
IDROPULITRICE AD ACQUA FREDDA**

MAXI 1

Power, durability and quieter operation for washing with cold water: the best efficiency for professional use.

Light, handy, easy to use but with a flow and pressure capable of meeting the most demanding tasks.

Sturdiness, attractive design and durability are guaranteed by a shimmed painted steel frame and a stainless steel cover.

Potenza, lunga durata e silenziosità per il lavaggio ad acqua fredda: il top dell'efficienza per l'utilizzo professionale.

Leggera, maneggevole, semplice da utilizzare ma con una portata e una potenza in grado di assolvere ai più gravosi incarichi di lavaggio.

Robustezza, design e durevolezza nel tempo sono garantiti da un telaio in acciaio spessorato verniciato e da una cofanatura in acciaio inox.





Triplex pump with ceramic plungers connecting rod system, brass head pump, with pressure gauge, pressure regulator and built-in detergent suction.
 Pompa professionale con testa in ottone e pistoni in ceramica, con manometro, regolazione della pressione e aspirazione detergente incorporata


Electric Motor / Motore elettrico

230/400 V / 50 Hz Standard
 60 Hz Su richiesta / *On request*


5 mt. electric cable
 Cavo elettrico da 5 mt.



PULITECNO



STANDARD ACCESSORIES ACCESSORI STANDARD

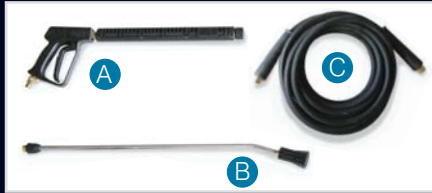

TSI security system including: (A) time delayed auto stop start; (B) stop after 1 hour in total stop; (C) stop for leak detection; (D) stop for lack of water; (E) stop in case of motor over-heating - error signal indicated by warning lights.

Comando a distanza TSI (Total Stop Intelligente) con funzioni: (A) total stop temporizzato; (B) arresto dopo 1 ora di total stop; (C) arresto per microperdite; (D) arresto per mancanza acqua; (E) arresto per surriscaldamento motore - segnalazione d'errore tramite spia intermittente.

24 V control panel (TSI only).

Comandi in bassa tensione 24V (solo versione TSI).

Practical tilting system of the handle for better handling during transportation and for stocking purposes.

Pratico sistema per il ribaltamento del manico per una miglior maneggevolezza nel trasporto e nello stoccaggio.

- A** Gun / Pistola (cod. 6000026/1)
- B** Lance / Lancia (cod. 6000027/1)
- C** 10 mt. H.P. hose / Tubo A.P. 10 mt. (cod. 6180035/1)

MAXI 1	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso	Box dimensions Dimensione scat.	Pallet q.ty Q.tà pallet	Q.ty per container Q.tà per container		Machine dimensions Dimensione macchina	
		bar	PSI	Lt/h	gph				°C	°F				kg	LxWxH (cm)		20 ft
	W100.12 M-TSI	94500007	100	1.500	720	190	3	100			57						
	W130.10 M-TSI	94500030	130	1.900	600	159	3	100			57						
	W150.14 T-TSI	94500034	150	2.200	840	222	5,5	100	1.450	60	140	86x60x63	6	60	120	90x58x83	
	XM120.11M-TSI	94500022	120	1.800	660	174	3	100			57						
	XM150.15 T-TSI	94500046	150	2.200	900	238	5,5	100			57						
	RK200.15 T-TSS	94501000	200	3.000	900	238	7,5	112			70						
	RK150.21 T-TSS	94501010	150	2.200	1.260	333	7,5	112			70						

Pump type - Tipo pompe **XM - RK** **A.R.** **W** **I.P.** M=1~ T=3~

TSI = Intelligent Total Stop - Arresto Totale Intelligente
TSS = Autostop-Start - Comando a distanza TSS

OPTIONAL ACCESSORIES ACCESSORI OPTIONAL



Pipe cleaning nozzle
Ugello sturatubi

cod. 1000393



cod. 6000605/KIT

Sand blasting kit
Kit sabbiatura



cod. 16000490

Double nozzle carrier
(supplied without nozzles)
Testina doppia
(fornita priva di ugelli)



RK200.15 Rotating nozzle
Ugello rotante RK200.15
cod. 1000386KIT

Rotating nozzle
Ugello rotante
cod. 1000385KIT



Foam lance LS 12
Lancia schiuma LS 12

cod. P25180015



cod. 6000663KIT

Rotating brush
Spazzola rotante



cod. 4000245

H.P. connection sealing
Sigillante per raccordi A.P.



cod. 6000552

(*15 mts. hosereel kit
Kit avvolgitubo 15 m.