

COLD WATER H.P. CLEANER  
IDROPULITRICE AD ACQUA FREDDA

## MAXI 4-5



*Industrial cold water high pressure washer.  
Top efficiency for large jobs.*

*Handy, easy to use, with a flow and pressure  
able to cope with the most challenging and  
resistant situations.*

*Sturdiness, attractive design and durability  
are guaranteed by a shimmed painted steel  
frame and a stainless steel cover.*

Classe Industriale ad acqua fredda al  
massimo livello.

Il top dell'efficienza per i grandi lavori.

Maneggevole, semplice da utilizzare ma  
con una portata e una potenza in grado  
di far fronte alle situazioni più impegnative  
e resistenti.

Robustezza, design e lunga durata nel  
tempo sono garantiti da un telaio in acciaio  
spessorato verniciato e da una cofanatura  
in acciaio inox.





Standard for Maxi 4  
Optional for Maxi 5

Industrial triplex pumps with ceramic plungers connecting rod system and brass head.  
Pressure gauge (Maxi 5 - 1000 bar)

Pressure regulator  
(600 bar in stainless steel AISI 304 Maxi 5).

Pompa professionale con testa in ottone e pistoni in ceramica.

Manometro (Maxi 5 - 1000 bar).  
Regolazione della pressione (valvola inox 600 bar Maxi 5).

IE2 High efficiency electric Motor.

Motore elettrico ad alta efficienza IE2.  
400/690 V / 50 Hz Standard  
60 Hz Su richiesta / On request

5 mt. electric cable

Cavo elettrico da 5 mt.

Parking brake.

Freno di stazionamento.



TSI security system including: (A) time delayed auto stop start; (B) stop after 1 hour in total stop; (C) stop for leak detection; (D) stop for lack of water; (E) stop in case of motor over-heating - error signal indicated by warning lights.

Comando a distanza TSI (Total Stop Intelligente) con funzioni: (A) total stop temporizzato; (B) arresto dopo 1 ora di total stop; (C) arresto per microperdite; (D) arresto per mancanza acqua; (E) arresto per surriscaldamento motore - segnalaz. d'errore tramite spia intermittente.

Safety valve (Maxi 4 standard - optional Maxi 5).

Valvola di sicurezza (Maxi 4 standard - Maxi 5 optional).

Flexible coupling with steel protection (Maxi 5).

Giunto elastico con protezione (Maxi 5).


Flexible coupling with flange (Maxi 4).

Flangia e giunto elastico (Maxi 4).


Stainless steel water tank for cooling the pump head (Maxi 5 AST, Maxi 4 optional)

Vaschetta acqua inox per raffreddamento testata (Maxi 5 AST, Maxi 4 optional).

STANDARD ACCESSORIES ACCESSORI STANDARD

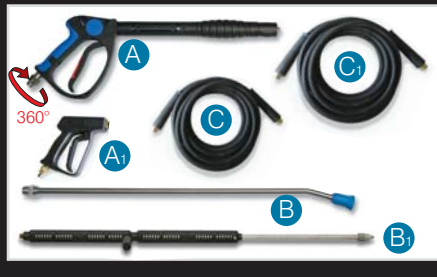

- A** Maxi 4 Gun / Pistola Maxi 4 (up to / fino a 350 bar - cod. 6600600)
- A1** Maxi 4-5 Gun / Pistola Maxi 5 (500 bar - cod. P30540000)
- B** Maxi 4 Lance / Lancia Maxi 4 (up to / fino a 350 bar - cod. 6600610)
- B1** Maxi 4-5 Lance / Lancia Maxi 5 (500 bar - cod. P30500092)
- C** Maxi 4 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 4 (up to / fino a 350 bar - cod. 6000145)
- C1** Maxi 4-5 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 5 (500 bar - cod. 6500135)

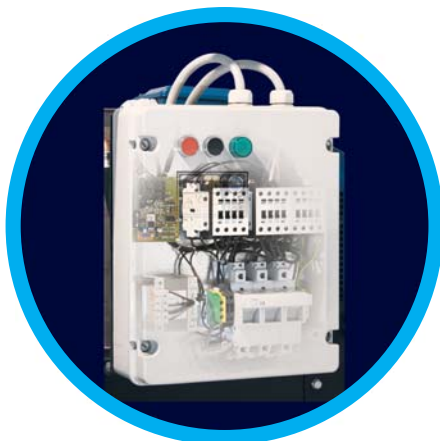

Electric panel.  
Quadro elettrico.



Shoulder rest / Controspalla (cod. P30506000)

Optional only for / solo per

SXW350.21 T-AST-TSI

W150.50 T-AST-TSI

MAXI 4	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso	Box dimensions Dimensione scat.	Pallet q.ty Q.tà pallet	Q.ty per container Q.tà per container		Machine dimensions Dimensione macchina
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft	
<b>SXW350.21 T-AST-TSI</b>	94500126	350	5.100	1.260	333		160IE2	1.450	60	140	215	146x89x107	2	16	32	140x82x90
<b>SHP500.15 T-AST-TSI</b>	94500149	500	7.250	900	238	20										
<b>W150.50 T-AST-TSI</b>	94500147	150	2.200	3.000	793											

MAXI 5	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso	Box dimensions Dimensione scat.	Pallet q.ty Q.tà pallet	Q.ty per container Q.tà per container		Machine dimensions Dimensione macchina
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft	
<b>SHP500.22 T-AST</b>	94500160	500	7.250	1.320	349		180IE2	1.450	60	140	335	146x89x107	2	16	32	140x82x90
<b>SHP500.22 T-AST-TSI</b>	94500165	500	7.250	1.320	349											

Pump type - Tipo pompe **SXW - SHP** **A.R.** **W** **I.P.** T=3~ **AST** = Star triangle soft start - Avviamento stella triangolo  
**TSI** = Intelligent Total Stop - Arresto Totale Intelligente

OPTIONAL ACCESSORIES ACCESSORI OPTIONAL



500 bar inox rotating nozzle  
Ugello rotante 500 bar inox



350 bar rotating nozzle  
Ugello rotante 350 bar



Sand blasting head 500 bar round jet  
Testina sabbiante 500 bar a getto tondo + sonda + tubo